



Копировальное точение 45°



T = Полезная глубина (мм)
R = Радиус (мм)
F = Вылет инструмента (мм)

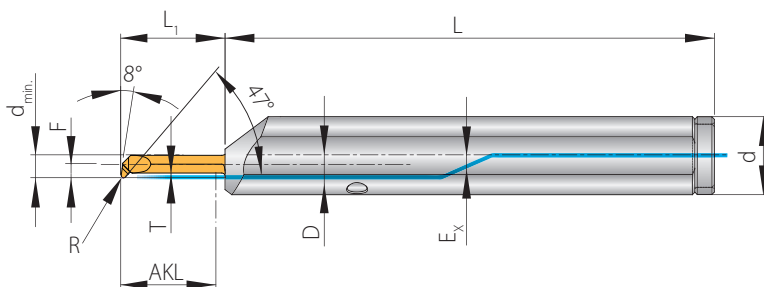

	Режущие вставки									Державки						
	d _{min}	AKL	T	EB	R	Артикул	PG 44	F		D	d	L	L ₁	E _x	Артикул	PG 44
НОВ	3,9	20	0,6	–	0,15	AMS-K45-3906015-200.40R	●	1,9		4	12	100	22	2,35	HAMS 1204 R	●
		20	1,3	–	0,4	AMS-K45-391304-200.40R	●					22	HAMS 1204 R		●	
НОВ	3,9	20	0,6	–	0,15	AMS-K45-3906015-200.40R	●	1,9		4	16	120	22	2,8	HAMS 1604 R	●
НОВ		20	1,3	–	0,4	AMS-K45-391304-200.40R	●					22	HAMS 1604 R		●	
НОВ	4,0	12	0,6	–	0,4	AMS-K45-400604-120.40R	●	1,9		4	12	100	14	2,35	HAMS 1204 R	●
		15				AMS-K45-400604-150.40R	●					17	HAMS 1204 R		●	
		20				0,8	AMS-K45-4008015-200.40R					●	22		HAMS 1204 R	●
НОВ	4,0	12	0,6	–	0,4	AMS-K45-400604-120.40R	●	1,9		4	16	120	14	2,8	HAMS 1604 R	●
15		AMS-K45-400604-150.40R				●	17					HAMS 1604 R	●			
НОВ		20				0,8	AMS-K45-4008015-200.40R					●	22		HAMS 1604 R	●
НОВ	5,0	25	1,0	–	0,15	AMS-K45-5010015-250.60R	●	2,45		6	12	100	27	2,35	HAMS 1206 R	●
НОВ	5,0	25	1,0	–	0,15	AMS-K45-5010015-250.60R	●	2,45		6	16	120	27	2,8	HAMS 1606 R	●
НОВ	5,9	30	1,8	–	0,15	AMS-K45-5918015-300.60R	●	2,9		6	12	100	32	2,35	HAMS 1206 R	●
НОВ	5,9	30	1,8	–	0,15	AMS-K45-5918015-300.60R	●	2,9		6	16	120	32	2,8	HAMS 1606 R	●
НОВ	6,9	10	2,9	–	0,2	AMS-K45-692902-100.60R*	●	2,9		6	12	100	12	2,35	HAMS 1206 R	●
НОВ		15				AMS-K45-692902-150.60R*	●					17	HAMS 1206 R		●	
НОВ		20				AMS-K45-692902-200.60R*	●					22	HAMS 1206 R		●	
НОВ	6,9	10	2,9	–	0,2	AMS-K45-692902-100.60R*	●	2,9		6	16	120	12	2,8	HAMS 1606 R	●
НОВ		15				AMS-K45-692902-150.60R*	●					17	HAMS 1606 R		●	
НОВ		20				AMS-K45-692902-200.60R*	●					22	HAMS 1606 R		●	
НОВ	8,9	15	3,9	–	0,2	AMS-K45-893902-150.80R*	●	3,9		8	16	120	17	2,8	HAMS 1608 R	●
НОВ		20				AMS-K45-893902-200.80R*	●					22	HAMS 1608 R		●	
НОВ		30				AMS-K45-893902-300.80R*	●					32	HAMS 1608 R		●	

*в наличии с K1/2016