




HSA-U



Показано правостороннее исполнение

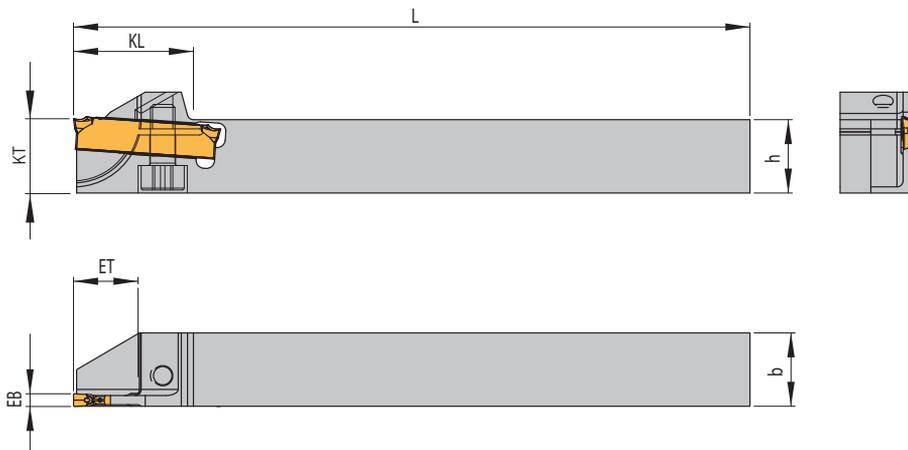

Державки для автоматов продольного точения (с зажимом снизу)

Артикул	EB	ET	D _{max}	D _R	h	b	L	KL	KT	Применяемая сменная пластина
HSA 1212U-L-SA24015-20	1,5	10,0	20	–	12	12	110	19,5	12	SA 24-15...
HSA 1212U-R-SA24015-20	1,5	10,0	20	–	12	12	110	19,5	12	SA 24-15...
HSA 1212U-R-SA2402-06	2,0	3,0	6	–	12	12	110	19,5	12	SA 24-20...
HSA 1212U-L-SA2402-12	2,0	6,0	12	–	12	12	110	19,5	12	SA 24-20...
HSA 1212U-R-SA2402-12	2,0	6,0	12	–	12	12	110	19,5	12	SA 24-20...
HSA 1212U-L-SA2402-20	2,0	10,0	20	–	12	12	110	19,5	12	SA 24-20...
HSA 1212U-R-SA2402-20	2,0	10,0	20	–	12	12	110	19,5	12	SA 24-20...
HSA 1616U-L-SA2402-32	2,0	16,0	32	–	16	16	110	25,5	16	SA 24-20...
HSA 1616U-R-SA2402-32	2,0	16,0	32	–	16	16	110	25,5	16	SA 24-20...

D_{max} = Максимальный диаметр отрезки прутка

Запасные части

Державка	Винт	Ключ
HSA 0808... – HSA 2020...	AS0022	KS8000