
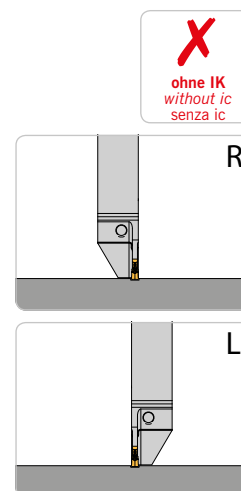


HSA-U

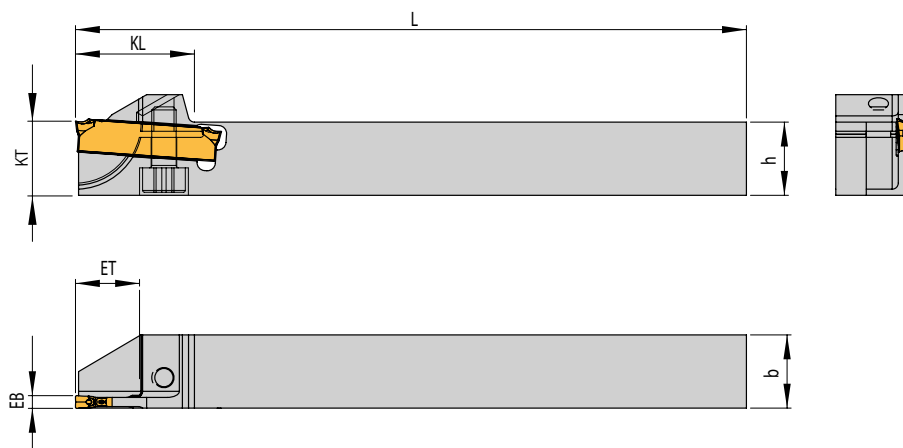

Rechte Ausführung abgebildet
Right-hand execution shown
Versione destra in figura

Für Langdrehautomaten (mit Klemmung von unten)
For sliding head auto lathes (with clamping from below)
Per fantina mobile (con bloccaggio da sotto)

Bezeichnung Designation Articolo	EB	ET	D _{max}	D _R	h	b	L	KL	KT	PG 37	Schneideinsatz Insert Inserto	Neuerung News Novità
HSA 1212U-L-SA16015-20	1,5	10	20	–	12	12	110	19,5	12	●	SA16-15...	SA16 Platte mit EB 1,5 mm SA16 insert with 1.5 mm width
HSA 1212U-R-SA16015-20	1,5	10	20	–	12	12	110	19,5	12	●	SA16-15...	Inserto SA16 con EB 1,5 mm

D_{max} = Maximaler Durchmesser bei Vollmaterial
D_{max} = Maximum diameter in solid
D_{max} = Diametro massimo lavorazione dal pieno

Ersatzteile / Spare parts / Ricambi

Halter Holder Stelo	Schraube Screw Vite	Schlüssel Key Chiave
HSA 1212U...	DIN912-M4X10-12.9	KP1111