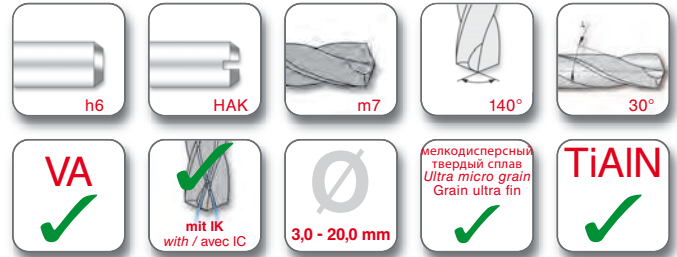
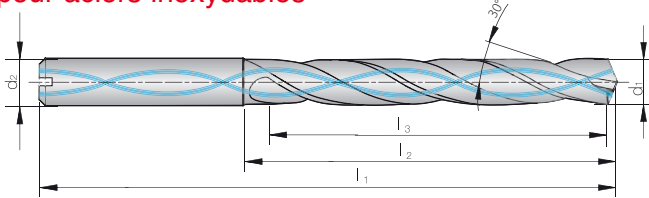


ARNO®
WERKZEUGE
Твердосплавные сверла
Solid carbide twist drills
Foret carbure monobloc
Средняя длина
mid-length design
série standard
5 x D С каналами для подвода СОЖ
with internal coolant supply
avec arrosage
Для нержавеющей стали / for stainless steel /
pour aciers inoxydables


Обозначение Designation Désignation	d ₁ m7	d ₂ h6	l ₁	l ₂	l ₃
SPC0030-0150-VA VHM/TiAlN	3,0	6	66	28	15,0
SPC0031-0155-VA VHM/TiAlN	3,1	6	66	28	15,5
SPC0032-0160-VA VHM/TiAlN	3,2	6	66	28	16,0
SPC0033-0165-VA VHM/TiAlN	3,3	6	66	28	16,5
SPC0034-0170-VA VHM/TiAlN	3,4	6	66	28	17,0
SPC0035-0175-VA VHM/TiAlN	3,5	6	66	28	17,5
SPC0036-0180-VA VHM/TiAlN	3,6	6	66	28	18,0
SPC0037-0185-VA VHM/TiAlN	3,7	6	66	28	18,5
SPC0038-0190-VA VHM/TiAlN	3,8	6	74	36	19,0
SPC0039-0195-VA VHM/TiAlN	3,9	6	74	36	19,5
SPC0040-0200-VA VHM/TiAlN	4,0	6	74	36	20,0
SPC0041-0205-VA VHM/TiAlN	4,1	6	74	36	20,5
SPC0042-0210-VA VHM/TiAlN	4,2	6	74	36	21,0
SPC0043-0215-VA VHM/TiAlN	4,3	6	74	36	21,5
SPC0044-0220-VA VHM/TiAlN	4,4	6	74	36	22,0
SPC0045-0225-VA VHM/TiAlN	4,5	6	74	36	22,5
SPC0046-0230-VA VHM/TiAlN	4,6	6	74	36	23,0
SPC0047-0235-VA VHM/TiAlN	4,7	6	74	36	23,5
SPC0048-0240-VA VHM/TiAlN	4,8	6	82	44	24,0
SPC0049-0245-VA VHM/TiAlN	4,9	6	82	44	24,5
SPC0050-0250-VA VHM/TiAlN	5,0	6	82	44	25,0
SPC0051-0255-VA VHM/TiAlN	5,1	6	82	44	25,5
SPC0052-0260-VA VHM/TiAlN	5,2	6	82	44	26,0
SPC0053-0265-VA VHM/TiAlN	5,3	6	82	44	26,5
SPC0054-0270-VA VHM/TiAlN	5,4	6	82	44	27,0
SPC0055-0275-VA VHM/TiAlN	5,5	6	82	44	27,5
SPC0056-0280-VA VHM/TiAlN	5,6	6	82	44	28,0
SPC0057-0285-VA VHM/TiAlN	5,7	6	82	44	28,5
SPC0058-0290-VA VHM/TiAlN	5,8	6	82	44	29,0
SPC0059-0295-VA VHM/TiAlN	5,9	6	82	44	29,5
SPC0060-0300-VA VHM/TiAlN	6,0	6	82	44	30,0

Обозначение Designation Désignation	d ₁ m7	d ₂ h6	l ₁	l ₂	l ₃
SPC0061-0305-VA VHM/TiAlN	6,1	8	91	53	30,5
SPC0062-0310-VA VHM/TiAlN	6,2	8	91	53	31,0
SPC0063-0315-VA VHM/TiAlN	6,3	8	91	53	31,5
SPC0064-0320-VA VHM/TiAlN	6,4	8	91	53	32,0
SPC0065-0325-VA VHM/TiAlN	6,5	8	91	53	32,5
SPC0066-0330-VA VHM/TiAlN	6,6	8	91	53	33,0
SPC0067-0335-VA VHM/TiAlN	6,7	8	91	53	33,5
SPC0068-0340-VA VHM/TiAlN	6,8	8	91	53	34,0
SPC0069-0345-VA VHM/TiAlN	6,9	8	91	53	34,5
SPC0070-0350-VA VHM/TiAlN	7,0	8	91	53	35,0
SPC0071-0355-VA VHM/TiAlN	7,1	8	91	53	35,5
SPC0072-0360-VA VHM/TiAlN	7,2	8	91	53	36,0
SPC0073-0365-VA VHM/TiAlN	7,3	8	91	53	36,5
SPC0074-0370-VA VHM/TiAlN	7,4	8	91	53	37,0
SPC0075-0375-VA VHM/TiAlN	7,5	8	91	53	37,5
SPC0076-0380-VA VHM/TiAlN	7,6	8	91	53	38,0
SPC0077-0385-VA VHM/TiAlN	7,7	8	91	53	38,5
SPC0078-0390-VA VHM/TiAlN	7,8	8	91	53	39,0
SPC0079-0395-VA VHM/TiAlN	7,9	8	91	53	39,5
SPC0080-0400-VA VHM/TiAlN	8,0	8	91	53	40,0
SPC0081-0405-VA VHM/TiAlN	8,1	10	103	61	40,5
SPC0082-0410-VA VHM/TiAlN	8,2	10	103	61	41,0
SPC0083-0415-VA VHM/TiAlN	8,3	10	103	61	41,5
SPC0084-0420-VA VHM/TiAlN	8,4	10	103	61	42,0
SPC0085-0425-VA VHM/TiAlN	8,5	10	103	61	42,5
SPC0086-0430-VA VHM/TiAlN	8,6	10	103	61	43,0
SPC0087-0435-VA VHM/TiAlN	8,7	10	103	61	43,5
SPC0088-0440-VA VHM/TiAlN	8,8	10	103	61	44,0
SPC0089-0445-VA VHM/TiAlN	8,9	10	103	61	44,5
SPC0090-0450-VA VHM/TiAlN	9,0	10	103	61	45,0
SPC0091-0455-VA VHM/TiAlN	9,1	10	103	61	45,5