

Комплектующие корпуса сверла / Holder accessories / Accessoires porte-outils

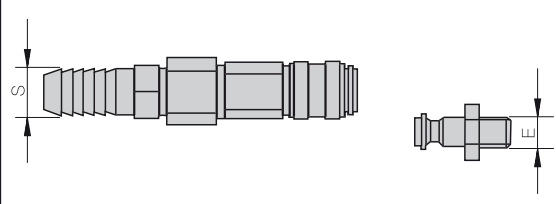
Z	Серия используемого корпуса Used on the holder series Correspondance série du porte-outil	Быстросъемный штуцер Fast action Coupling Raccord rapide	Кольцо для подачи СОЖ Rotary Coolant Adapters Joint tournant	Фиксатор Solid steady bar Barre de stabilisation
2KDA	A - C - E - G	SK-2KDA	R-2KDA	SS-2KDA
3KDA	I - K - M	SK-3KDA	R-3KDA	SS-3KDA
4KDA	O - Q	SK-4KDA	R-4KDA	SS-4KDA
5KDA	S	SK-5KDA	R-5KDA	SS-5KDA
6KDA	U - W	SK-6KDA	R-6KDA	SS-6KDA

Таблица 1
See table 1
Voir tableau 1

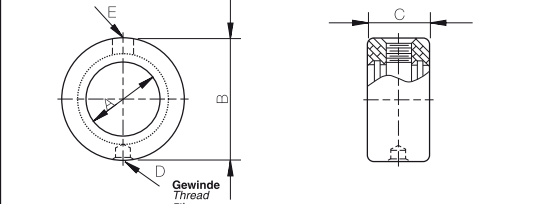
Таблица 2
See table 2
Voir tableau 2

Таблица 3
See table 3
Voir tableau 3


1) Быстросъемный штуцер / Fast action coupling / Raccord rapide

Обозначение Designation Désignation		Присоединительная резьба Norm Pipe Thread Pas Gaz	Шланг Ø S Hose Ø Tuyau Ø S
SK-2KDA		1/8"	9 mm
SK-3KDA		1/8"	9 mm
SK-4KDA		1/4"	9 mm
SK-5KDA		1/4"	12 mm
SK-6KDA		1/2"	12 mm

2) Кольцо для подачи СОЖ / Rotary coolant adapters / Joint tournant

Обозначение Item No. Réf. article		A	B	C	D	E
R-2KDA		19,05	44,45	22,23	M8	1/8"
R-3KDA		25,40	53,97	28,57	M8	1/8"
R-4KDA		31,75	63,50	34,92	M10	1/4"
R-5KDA		44,45	76,20	34,92	M10	1/4"
R-6KDA		57,15	95,27	44,45	M12	1/2"

3) Фиксатор кольца / Solid steady bar / Barre de stabilisation

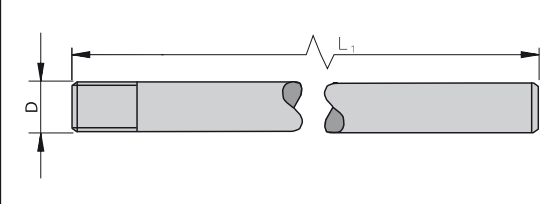Обозначение Designation Désignation		Маркировка резьбы Thread size Pas	L ₁ [mm]
SS-2KDA		M8	250
SS-3KDA		M8	250
SS-4KDA		M10	250
SS-5KDA		M10	250
SS-6KDA		M12	250

Винты и отвертки / Screws and Screwdrivers / Vis et tournevis

Серия Series Séries	Диапазон диаметров Drill Range used with Tournevis dynamométrique	Отвертка Torx Screwdriver Torx Clé Torx	Динамометрический момент Torque Couple de serrage	Винты Screws Vis
A	9,5 - 11,0	T5107	0,6 Nm	AS 0011
C	11,5 - 12,8	T5107	0,6 Nm	AS 0011
E	13,0 - 17,5	T5108	1,3 Nm	AS 0012
G	15,5 - 17,5	T5108	1,3 Nm	AS 0018
I	17,8 - 24,0	T5109	2,2 Nm	AS 0013
K	22,0 - 24,0	T5109	2,2 Nm	AS 0019
M	24,5 - 35,0	T5115	5,1 Nm	AS 0014
O	30,0 - 35,0	T5115	5,1 Nm	AS 0014
Q	36,0 - 47,0	T5120	6,2 Nm	AS 0015
S	48,0 - 65,0	T5120	6,2 Nm	AS 0015
U	66,0 - 89,0	T5125	8,1 Nm	AS 0016
W	90,0 - 114,0	T5125	8,1 Nm	AS 0016



Примечание ⇨ Допустимые моменты затяжки смотрите на странице 253. / Remark ⇨ For torque screw drivers see page 253. / Remarque ⇨ Pour le tournevis dynamométrique, voir page 253.