


Wendeschneidplatten – HSS Schneidstoff

Indexable inserts – HSS cutting material

Сменные пластины – Быстрорежущая сталь

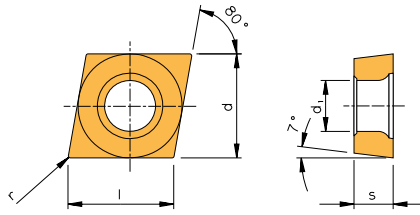

CCFT



Bezeichnung Designation Обозначение	l	d	s	r	d ₁	γ	Sorten / Grades / Сплавы
							beschichtet/ coated/ с покрытием
							HSS-TIN
CCFT 060201FL-G	6,40	6,350	2,38	0,1	3,0	20°	●
CCFT 060201FR-G	6,40	6,350	2,38	0,1	3,0	20°	●
CCFT 060202FL-G	6,40	6,350	2,38	0,2	3,0	20°	●
CCFT 060202FR-G	6,40	6,350	2,38	0,2	3,0	20°	●
CCFT 060204FL-G	6,40	6,350	2,38	0,4	3,0	20°	●
CCFT 060204FR-G	6,40	6,350	2,38	0,4	3,0	20°	●
CCFT 09T304FL-G	9,70	9,525	3,96	0,4	4,5	25°	●
CCFT 09T304FR-G	9,70	9,525	3,96	0,4	4,5	25°	●
CCFT 09T308FL-G	9,70	9,525	3,96	0,8	4,5	25°	●
CCFT 09T308FR-G	9,70	9,525	3,96	0,8	4,5	25°	●
CCFT 060202FL-K	6,40	6,350	2,38	0,2	3,0	30°	●
CCFT 060202FR-K	6,40	6,350	2,38	0,2	3,0	30°	●
CCFT 060204FL-K	6,40	6,350	2,38	0,4	3,0	30°	●
CCFT 060204FR-K	6,40	6,350	2,38	0,4	3,0	30°	●
CCFT 09T304FL-K	9,70	9,525	3,96	0,4	4,5	30°	●
CCFT 09T304FR-K	9,70	9,525	3,96	0,4	4,5	30°	●
CCFT 09T308FL-K	9,70	9,525	3,96	0,8	4,5	30°	●
CCFT 09T308FR-K	9,70	9,525	3,96	0,8	4,5	30°	●

- **Hauptanwendung**
Main application
Основное применение
- **Nebenanwendung**
Secondary application
Вторичное применение

P	●
M	●
K	
N	
S	○
H	

3