


# Wendeschneidplatten – HSS Schneidstoff

Indexable inserts – HSS cutting material

Сменные пластины – Быстрорежущая сталь

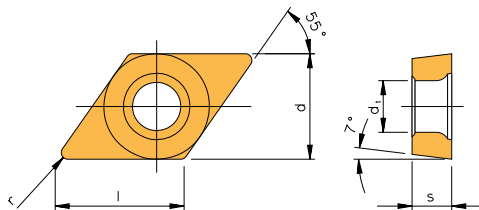


## DCFT



Bezeichnung Designation Обозначение	l	d	s	r	d <sub>1</sub>	γ	Sorten / Grades / Сплавы
							beschichtet/ coated/ с покрытием
							HSS-TiN
DCFT 070201FL-G	7,75	6,350	2,38	0,1	3,0	20°	●
DCFT 070201FR-G	7,75	6,350	2,38	0,1	3,0	20°	●
DCFT 070202FL-G	7,75	6,350	2,38	0,2	3,0	20°	●
DCFT 070202FR-G	7,75	6,350	2,38	0,2	3,0	20°	●
DCFT 070204FL-G	7,75	6,350	2,38	0,4	3,0	20°	●
DCFT 070204FR-G	7,75	6,350	2,38	0,4	3,0	20°	●
DCFT 11T304FL-G	11,60	9,525	3,96	0,4	4,5	25°	●
DCFT 11T304FR-G	11,60	9,525	3,96	0,4	4,5	25°	●
DCFT 11T308FL-G	11,60	9,525	3,96	0,8	4,5	25°	●
DCFT 11T308FR-G	11,60	9,525	3,96	0,8	4,5	25°	●
DCFT 070202FL-K	7,75	6,350	2,38	0,2	3,0	30°	●
DCFT 070202FR-K	7,75	6,350	2,38	0,2	3,0	30°	●
DCFT 070204FL-K	7,75	6,350	2,38	0,4	3,0	30°	●
DCFT 070204FR-K	7,75	6,350	2,38	0,4	3,0	30°	●
DCFT 11T304FL-K	11,60	9,525	3,96	0,4	4,5	30°	●
DCFT 11T304FR-K	11,60	9,525	3,96	0,4	4,5	30°	●
DCFT 11T308FL-K	11,60	9,525	3,96	0,8	4,5	30°	●
DCFT 11T308FR-K	11,60	9,525	3,96	0,8	4,5	30°	●

- **Hauptanwendung**  
Main application  
Основное применение
- **Nebenanwendung**  
Secondary application  
Вторичное применение

P	●
M	●
K	
N	
S	○
H	

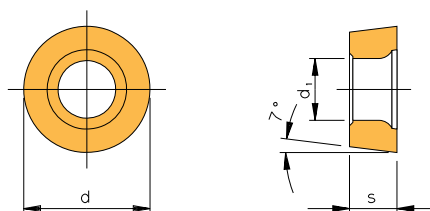

## RCFT



Bezeichnung Designation Обозначение	d	s	r	d <sub>1</sub>	γ	Sorten / Grades / Сплавы
						beschichtet/ coated/ с покрытием
						HSS-TiN
RCFT 0602MOFN	6	2,38	-	3,0	25°	●
RCFT 0803MOFN	8	3,18	-	3,6	25°	●
RCFT 10T3MOFN	10	3,97	-	4,5	25°	●
RCFT 1204MOFN	12	4,76	-	5,5	25°	●
RCFT 1606MOFN	16	6,35	-	5,5	25°	●
RCFT 2006MOFN	20	6,35	-	6,5	25°	●

- **Hauptanwendung**  
Main application  
Основное применение
- **Nebenanwendung**  
Secondary application  
Вторичное применение

P	●
M	●
K	
N	
S	○
H	