


Außengewinde / External threading / Наружная резьба

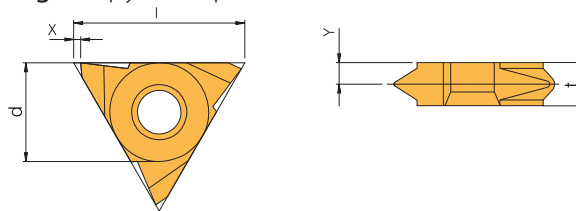

Ausführung / Type / Тип:

V

Rechte Ausführung abgebildet / Right-hand execution shown / Показано правостороннее исполнение

	Teilung Pitch Шар	Links Left Левая	Rechts Right Правая	d	h _{min}	x	y	t	Sorten / Grades / Сплавы			Klemmhalter Tool holder Державка
									beschichtet coated с покрытием		unbe- schichtet uncoated без покрытия	
	[mm]								AL100	AM15C	AK20	
27	6		27VER-V-ISO6,00	15,88	3,68	1,0	3,3	6	●	●		NL...-5V-6
27	6	27VEL-V-ISO6,00		15,88	3,68	1,0	3,3	6	●			NL...-5V-6
27	8		27VER-V-ISO8,00	15,88	4,91	1,0	4,3	8	●	●	●	NL...-5V-8
27	8	27VEL-V-ISO8,00		15,88	4,91	1,0	4,3	8	●	●		NL...-5V-8
27	10		27VER-V-ISO10,00	15,88	6,13	1,0	5,2	10	●	●		NL...-5V-10

	P	M	K	N	S	H
●	●	●	○	○	○	○
○	○	○	○	○	○	○

● **Hauptanwendung**
Main application
Основное применение

○ **Nebenanwendung**
Secondary application
Вторичное применение