


Metrisch

Metric

Метрическая



Innengewinde / Internal threading / Внутренняя резьба

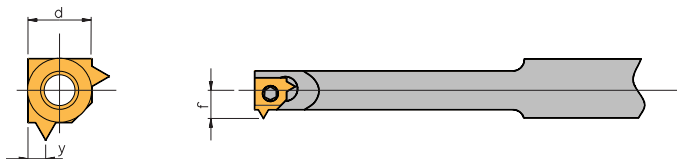

Ausführung / Type / Тип:

MINI 2

Rechte Ausführung abgebildet / Right-hand execution shown / Показано правостороннее исполнение

Teilung Pitch Шаг	Links Left Левая	Rechts Right Правая	d	h _{min}	y	f	Min Bohr ø min Drill ø МИН. Ø ОТВ.	Sorten / Grades / Сплавы			Klemmhalter Tool holder Державка
								AL100	AM15C	HSS-TiN	
0,35		5LIR-V-ISO0,35	5	0,20	0,3	3,75	7,30		●		...NVR10.-5L*
0,5		5LIR-V-ISO0,50	5	0,29	0,4	3,75	7,30	●	●	●	...NVR10.-5L*
0,5	5LIL-V-ISO0,50		5	0,29	0,4	3,75	7,30		●		...NVR10.-5L*
0,75		5LIR-V-ISO0,75	5	0,43	0,6	3,91	7,50	●	●	●	...NVR10.-5L*
0,75	5LIL-V-ISO0,75		5	0,43	0,6	3,91	7,50		●		...NVR10.-5L*
1,0		5LIR-V-ISO1,00	5	0,58	0,7	4,06	7,70	●	●	●	...NVR10.-5L*
1,0	5LIL-V-ISO1,00		5	0,58	0,7	4,06	7,70		●	●	...NVR10.-5L*
1,25		5LIR-V-ISO1,25	5	0,72	0,9	4,21	7,80		●	●	...NVR10.-5L*
1,25	5LIL-V-ISO1,25		5	0,72	0,9	4,21	7,80		●	●	...NVR10.-5L*
1,5		5LIR-V-ISO1,50	5	0,87	1,0	4,35	7,90	●	●	●	...NVR10.-5L*
1,5	5LIL-V-ISO1,50		5	0,87	1,0	4,35	7,90		●	●	...NVR10.-5L*
1,75		5LIR-V-ISO1,75	5	1,01	1,05	4,51	8,00		●	●	...NVR10.-5L*
1,75	5LIL-V-ISO1,75		5	1,01	1,05	4,51	8,00		●	●	...NVR10.-5L*
2,0		5LIR-V-ISO2,00	5	1,15	1,05	4,65	8,00		●	●	...NVR10.-5L*
2,0	5LIL-V-ISO2,00		5	1,15	1,05	4,65	8,00		●	●	...NVR10.-5L*

*Grundhalter finden Sie auf Seite 345.
Please see page 345 for holder.
Державки см. на стр. 345.

P	●	○	●
M	●	●	○
K	○		
N			
S	○		○
H			

● Hauptanwendung
Main application
Основное применение

○ Nebenanwendung
Secondary application
Вторичное применение