


Whitworth Rohrgewinde

Whitworth pipe thread

Трубная резьба Витурта

BSW, BSP

Außengewinde / External threading / Наружная резьба

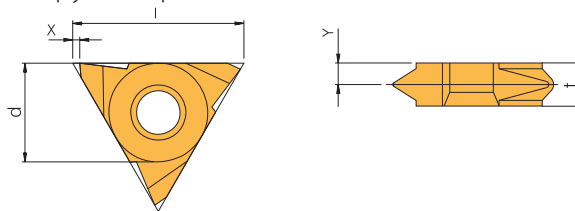

Ausführung / Type / Тип:

V

Rechte Ausführung abgebildet / Right-hand execution shown / Показано правостороннее исполнение

Teilung Pitch Шар	Links Left Левая	Rechts Right Правая	d	h _{min}	x	y	t	Sorten / Grades / Сплавы			Klemmhalter Tool holder Державка	
								AL100	AM7C beschichtet coated с покрытием	AM15C unbeschichtet uncoated без покрытия		
[ниток/дюйм]												
27	4	27VEL-V-W4	15,88	4,07	1,0	3,3	6				●	NL...-5V-6
27	3	27VER-V-W3	15,88	5,42	1,0	4,3	8	●			●	NL...-5V-8
27	2,5	27VER-V-W2,5	15,88	6,51	1,0	5,2	10	●	●	●		NL...-5V-10

	AL100	AM7C	AM15C	AK20
P	●		○	
M	●	●	●	
K	○	○		●
N				●
S	○			
H				

- **Hauptanwendung**
Main application
Основное применение
- **Nebenanwendung**
Secondary application
Вторичное применение