


Whitworth Rohrgewinde

Whitworth pipe thread

Трубная резьба Витурта

BSW, BSP

Innengewinde / Internal threading / Внутренняя резьба




Ausführung / Type / Тип:

U

Teilung Pitch Шаг [ниток/дюйм]	Links / Rechts Left / Right Левая / Правая	d	h _{min}	x	y	Sorten / Grades / Сплавы		Klemmhalter Tool holder Державка	
						AL100	AM15C		
22	4,5	22UIN-V-W4,5	12,7	3,61	2,3	11,0	●	●	AVR..-4U
22	4	22UIN-V-W4	12,7	4,07	1,8	11,0	●	●	AVR..-4U
22	3,5	22UIN-V-W3,5	12,7	4,65	2,1	11,0	●	●	AVR..-4U
27	3,5	27UIN-V-W3,5	15,88	4,65	2,1	13,7	●	●	AVR..-5U
27	3,25	27UIN-V-W3,25	15,88	5,00	2,0	13,7	●	●	AVR..-5U
27	3	27UIN-V-W3	15,88	5,42	2,3	13,7	●	●	AVR..-5U
27	2,75	27UIN-V-W2,75	15,88	5,91	2,4	13,7	●	●	AVR..-5U

P	●	○
M	●	●
K	○	
N		
S	○	
H		

- Hauptanwendung
Main application
Основное применение
- Nebenanwendung
Secondary application
Вторичное применение

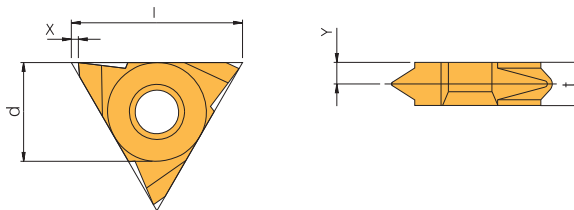

Ausführung / Type / Тип:

V

Rechte Ausführung abgebildet / Right-hand execution shown / Показано правостороннее исполнение

Teilung Pitch Шаг [ниток/дюйм]	Links Left Левая	Rechts Right Правая	d	h _{min}	x	y	t	Sorten / Grades / Сплавы			Klemmhalter Tool holder Державка
								beschichtet coated с покрытием	unbeschichtet uncoated без покрытия	AK20	
27	4	27VIR-V-W4	15,88	4,07	1,0	3,3	6	●	●		NVR..-5V
27	3	27VIR-V-W3	15,88	5,42	1,0	4,3	8	●	●	●	NVR..-5V
27	3	27VIL-V-W3	15,88	5,42	1,0	4,3	8	●			NVR..-5V
27	2,5	27VIR-V-W2,5	15,88	6,51	1,0	5,2	10	●			NVR..-5V

P	●	○	
M	●	●	
K	○		●
N			●
S	○		
H			

- Hauptanwendung
Main application
Основное применение
- Nebenanwendung
Secondary application
Вторичное применение

5