


# Kegeliges Rohrgewinde

Tapered pipe thread

Коническая трубная резьба

# NPT

## Außengewinde / External threading / Наружная резьба

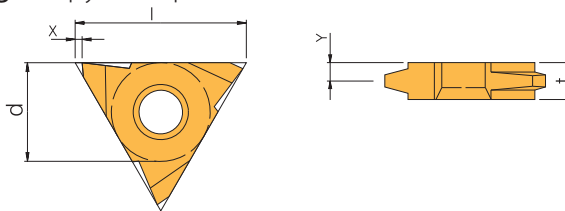

Ausführung / Type / Тип:

**Slim Throat / Slim Throat / Зауженные**

Rechte Ausführung abgebildet / Right-hand execution shown / Показано правостороннее исполнение

Teilung Pitch Шаг	Links Left Левая	Rechts Right Правая	d	h <sub>min</sub>	x	y	t	Sorten / Grades / Сплавы			Klemmhalter Tool holder Державка
								AL100	beschichtet coated с покрытием AM7C	AM15C	
11	18	<b>11VER-V-NPT18</b>	6,35	1,01	0,7	1,8	3,2	●		●	NL..-2V
11	18	<b>11VEL-V-NPT18</b>	6,35	1,01	0,7	1,8	3,2	●			NL..-2V
11	14	<b>11VER-V-NPT14</b>	6,35	1,33	0,7	1,8	3,2			●	NL..-2V
11	11,5	<b>11VER-V-NPT11,5</b>	6,35	1,64	0,7	2,1	3,2			●	NL..-2V
11	11,5	<b>11VEL-V-NPT11,5</b>	6,35	1,64	0,7	2,1	3,2			●	NL..-2V
16	27	<b>16VER-V-NPT27</b>	9,525	0,66	1,1	2,9	3,6	●		●	NL..-3V
16	18	<b>16VER-V-NPT18</b>	9,525	1,01	1,1	2,6	3,6	●	●	●	NL..-3V
16	18	<b>16VEL-V-NPT18</b>	9,525	1,01	1,1	2,6	3,6		●		NL..-3V
16	11,5	<b>16VER-V-NPT11,5</b>	9,525	1,64	1,1	2,1	3,6	●		●	NL..-3V
16	11,5	<b>16VEL-V-NPT11,5</b>	9,525	1,64	1,1	2,1	3,6	●			NL..-3V

P	●		○	
M	●	●	●	
K	○	○		●
N				●
S	○			
H				

● Hauptanwendung  
Main application  
Основное применение

○ Nebenanwendung  
Secondary application  
Вторичное применение