



VHM-Schaftfräser

2 Schneiden, lange Ausführung


Solid carbide end-mill

2 flutes, long design



AF50121-... / AF60121-...

Schaft / Shank DIN 6535HA / HB	d	d _A	l ₁	l
AF50121-020*	2,0	3,0	6,0	38
AF60121-028	2,8	6,0	7,0	57
AF60121-030	3,0	6,0	7,0	57
AF60121-035	3,5	6,0	7,0	57
AF60121-038	3,8	6,0	8,0	57
AF60121-040	4,0	6,0	8,0	57
AF60121-045	4,5	6,0	8,0	57
AF60121-048	4,8	6,0	10,0	57
AF60121-050	5,0	6,0	10,0	57
AF60121-055	5,5	6,0	10,0	57
AF60121-057	5,75	6,0	10,0	57
AF60121-060	6,0	6,0	10,0	57
AF60121-065	6,5	8,0	13,0	63
AF60121-067	6,75	8,0	13,0	63
AF60121-070	7,0	8,0	13,0	63
AF60121-075	7,5	8,0	16,0	63
AF60121-077	7,75	8,0	16,0	63
AF60121-080	8,0	8,0	16,0	63
AF60121-087	8,7	10,0	16,0	72
AF60121-090	9,0	10,0	16,0	72
AF60121-095	9,5	10,0	19,0	72
AF60121-097	9,7	10,0	19,0	72
AF60121-100	10,0	10,0	19,0	72
AF60121-105	10,5	12,0	22,0	83
AF60121-110	11,0	12,0	22,0	83
AF60121-117	11,7	12,0	22,0	83
AF60121-120	12,0	12,0	22,0	83
AF60121-137	13,7	14,0	22,0	83
AF60121-140	14,0	14,0	22,0	83
AF60121-150	15,0	16,0	26,0	92
AF60121-157	15,7	16,0	26,0	92
AF60121-160	16,0	16,0	26,0	92
AF60121-177	17,7	18,0	26,0	92
AF60121-180	18,0	18,0	26,0	92
AF60121-197	19,7	20,0	32,0	104
AF60121-200	20,0	20,0	32,0	104

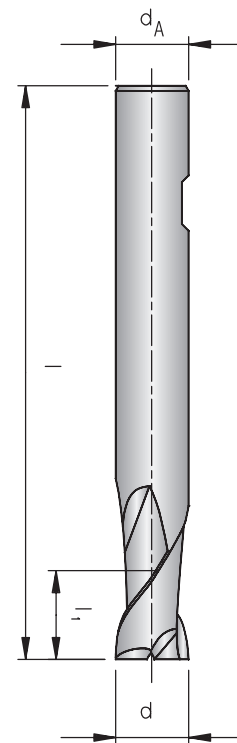

Toleranz / Tolerance	
Fräser / Mill	0 -0,03
Schaft / Shank	h6

* Zylinderschaft nach DIN 6535HA ohne Mitnahmefläche

* Cylindrical shank to DIN 6535HA, no flat

● = Hauptanwendung / Main application
○ = Nebenanwendung / Suitable

Alle Angaben in mm / Dimensions in mm