


VHM-Schaftfräser

2 Schneiden, lange Ausführung mit Eckenradius


Solid carbide end-mill

2 flutes, long design with corner radius

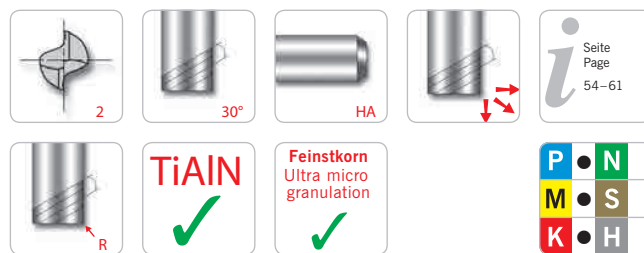

AF50121-...R...

Schaft / Shank DIN 6535HA	d	d _A	l ₁	l	R
AF50121-030R0,5	3,0	4,0	6,0	75	0,50
AF50121-030R1,0	3,0	4,0	6,0	75	1,00
AF50121-040R0,5	4,0	4,0	8,0	75	0,50
AF50121-040R1,0	4,0	4,0	8,0	75	1,00
AF50121-050R0,5	5,0	6,0	10,0	75	0,50
AF50121-050R1,0	5,0	6,0	10,0	75	1,00
AF50121-060R0,5	6,0	6,0	12,0	75	0,50
AF50121-060R1,0	6,0	6,0	12,0	75	1,00
AF50121-080R0,5	8,0	8,0	16,0	100	0,50
AF50121-080R1,0	8,0	8,0	16,0	100	1,00
AF50121-080R1,5	8,0	8,0	16,0	100	1,50
AF50121-080R2,0	8,0	8,0	16,0	100	2,00
AF50121-080R2,5	8,0	8,0	16,0	100	2,50
AF50121-100R0,5	10,0	10,0	20,0	100	0,50
AF50121-100R1,0	10,0	10,0	20,0	100	1,00
AF50121-100R1,5	10,0	10,0	20,0	100	1,50
AF50121-100R2,0	10,0	10,0	20,0	100	2,00
AF50121-100R2,5	10,0	10,0	20,0	100	2,50
AF50121-120R0,5	12,0	12,0	24,0	100	0,50
AF50121-120R1,0	12,0	12,0	24,0	100	1,00
AF50121-120R1,5	12,0	12,0	24,0	100	1,50
AF50121-120R2,0	12,0	12,0	24,0	100	2,00
AF50121-120R2,5	12,0	12,0	24,0	100	2,50

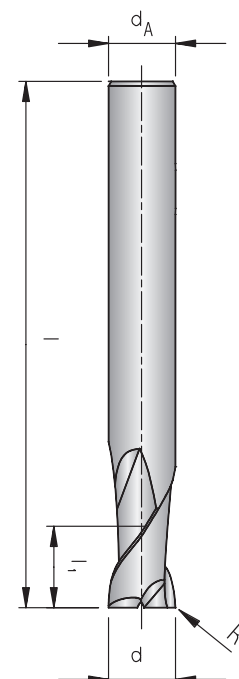

Toleranz / Tolerance	
Fräser / Mill	0 -0,03
Radius / Radius	± 0,03
Schaft / Shank	h6