


# Amerikanisches ISO-Zollgewinde

American thread  
Американская резьба

UN

## Innengewinde / Internal threading / Внутренняя резьба

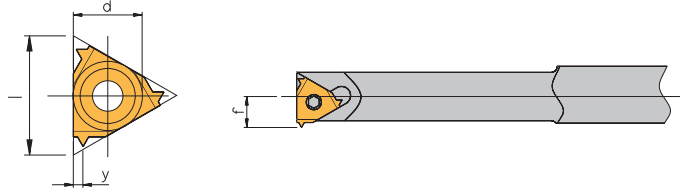

Ausführung / Type / Тип:  
**MINI 3**

Rechte Ausführung abgebildet / Right-hand execution shown / Показано правостороннее исполнение


Teilung Pitch Шаг	Links Left Левая	Rechts Right Правая	d	h <sub>min</sub>	y	f	Min Bohr ø min Drill ø МИН. Ø ОТВ.	Sorten / Grades / Сплавы			Klemmhalter Tool holder Державка
								AL100	AM15C	HSS-TiN	
6	32		4	0,46	0,5	3,50	6,15	●			...NVR.5-4.0K*
6	28		4	0,52	0,6	3,50	6,15	●			...NVR.5-4.0K*
6	24		4	0,61	0,6	3,60	6,25	●			...NVR.5-4.0K*
6	24	<b>4KIL-V-UN24</b>	4	0,61	0,6	3,60	6,25	●			...NVR.5-4.0K*
6	20		4	0,73	0,6	3,70	6,35	●			...NVR.5-4.0K*
6	18		4	0,81	0,7	3,70	6,35	●			...NVR.5-4.0K*
10	40	<b>6IL-V-UN40</b>	6	0,37	0,6	4,50	9,5		●		...NVR1...-6.0*
10	32		6	0,46	0,6	4,60	9,5		●	●	...NVR1...-6.0*
10	28		6	0,52	0,65	4,70	9,6		●	●	...NVR1...-6.0*
10	24		6	0,61	0,75	4,80	9,7		●	●	...NVR1...-6.0*
10	20		6	0,73	0,9	4,90	9,8		●	●	...NVR1...-6.0*
10	18		6	0,81	1,0	5,00	9,9	●	●	●	...NVR1...-6.0*
10	18	<b>6IL-V-UN18</b>	6	0,81	1,0	5,00	9,9		●	●	...NVR1...-6.0*
10	16		6	0,92	1,05	5,10	10,0		●	●	...NVR1...-6.0*
10	14		6	1,05	1,05	5,20	10,0		●	●	...NVR1...-6.0*

\*Grundhalter finden Sie auf Seite 344.  
Please see page 344 for holder.  
Державки см. на стр. 344.

P	●	○	●
M	●	●	○
K	○		
N			
S	○		○
H			

● Hauptanwendung  
Main application  
Основное применение

○ Nebenanwendung  
Secondary application  
Вторичное применение

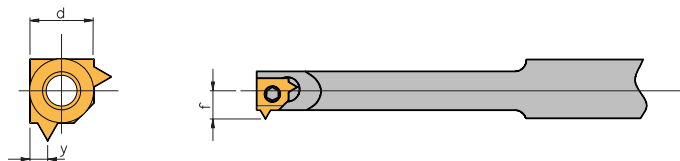

Ausführung / Type / Тип:  
**MINI 2**

Rechte Ausführung abgebildet / Right-hand execution shown / Показано правостороннее исполнение

Teilung Pitch Шаг	Links Left Левая	Rechts Right Правая	d	h <sub>min</sub>	y	f	Min Bohr ø min Drill ø МИН. Ø ОТВ.	Sorten / Grades / Сплавы			Klemmhalter Tool holder Державка
								AL100	AM15C	HSS-TiN	
32		<b>5LIR-V-UN32</b>	5	0,46	0,6	3,92	7,5		●	●	...NVR10.-5L*
28		<b>5LIR-V-UN28</b>	5	0,52	0,65	3,99	7,6		●	●	...NVR10.-5L*
24		<b>5LIR-V-UN24</b>	5	0,61	0,75	4,09	7,7		●	●	...NVR10.-5L*
24	<b>5LIL-V-UN24</b>		5	0,61	0,75	4,09	7,7		●	●	...NVR10.-5L*
20		<b>5LIR-V-UN20</b>	5	0,73	0,9	4,21	7,8	●	●	●	...NVR10.-5L*
18		<b>5LIR-V-UN18</b>	5	0,81	1,0	4,30	7,9		●	●	...NVR10.-5L*
16		<b>5LIR-V-UN16</b>	5	0,92	1,05	4,41	8,0		●	●	...NVR10.-5L*
14		<b>5LIR-V-UN14</b>	5	1,05	1,05	4,54	8,0		●	●	...NVR10.-5L*

\*Grundhalter finden Sie auf Seite 345.  
Please see page 345 for holder.  
Державки см. на стр. 345.

P	●	○	●
M	●	●	○
K	○		
N			
S	○		○
H			

● Hauptanwendung  
Main application  
Основное применение

○ Nebenanwendung  
Secondary application  
Вторичное применение

5